

Reon GLS

07625 A5.9-BC27

GLS 5.9W BC (B22) 2700K

- Replacement for incandescent GLS lamps
- Long life of 15,000hr
- Choices of 2700K, 4000K, 6500K
- Dimmable options



Overview

The Classic shaped GLS from Kosnic is a selected line of energy saving retrofit LED lamps. Reliable, affordable and easy to install.



General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IP Rating	IP20
Protection Rating	Class II
Installation Area	Internal
L80B10 Lifetime (h) @Ta 25 °C	13,000 h

Compliance

LVD	EN 62031:2020, EN 62471:2008, EN 62493:2015+A1:2022, EN 62560:2012+A11:2019
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023

Technical Summary

Product Code	A5.9-BC27
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	3.8A/200us
Default Power	5.9 W
Power Factor	0.55
Default CCT	2,700 K
SDCM of CCT	<6
CRI	80
Dimmable	N
Flicker	<1%
Lumens Output Maximum	806 lm
Maximum Efficiency	137 lm/W
L70B50 Lifetime (h) @Ta 25 °C	25,000 h
L80B10 Lifetime (h) @Ta 25 °C	13,000 h
L90B10 Lifetime (h) @Ta 25 °C	7,000 h
Nominal Lifetime (h)	25,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	0.030Kg
Dimensions (L x W x D) (mm)	105xØ60
Beam Angle - Lumi (°)	180

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com




3 **3 Years**
Product Warranty
UK Only

Reon GLS

07625 A5.9-BC27

Overview

The Classic shaped GLS from Kosnic is a selected line of energy saving retrofit LED lamps. Reliable, affordable and easy to install.

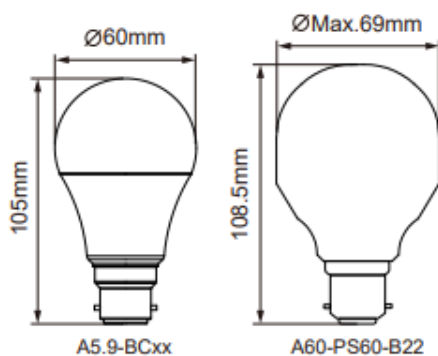

General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IP Rating	IP20
Nominal Lifetime (h)	25,000 h
Protection Rating	Class II
Installation Area	Internal

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

