


Pace UGR<19 1200x300



437

- Backlit LED panel suitable for education, commercial and ancillary area applications
- Slimline design allows for installation into shallow ceiling voids
- UGR<19 (unified glare rating) compliant luminaire assisting to eliminate glare for visual comfort
- Cool white, warm white and daylight options
- Dimmable and OCTO options available
- TPa as standard
- **Switch Dim, DALI and 0-10V dimming capability using the multi dimmable driver accessories ADDIM/30/MC (see p199 for more information)**
- **Self-Test Panel Pod and Sensor Pod compatible (see p454 for more information)**

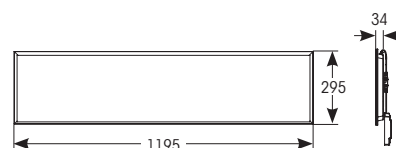

Powered by
CASAMBI



AIRMLED/POD/3NM/ST
Emergency Pod fitted

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
220/240V	50/60Hz	-10°C to 40°C	L80 54,000	80	3	80°	2	IP44

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	UGR
APACLED1/30/CW	1200 x 300 - Cool White	27W	4000K	3400lm	125lm/W	19

* For Warm White variant replace 'CW' with 'WW', and for Daylight product replace 'CW' with 'DL' into the above codes e.g. **APACLED1/30/WW**

AIRMLED/POD/3NM/ST	Emergency Pod	5W
AIRMLED/POD/MWS	Sensor Pod	1W

* UGR Value based on (4H - 8H)

CODE (OPTIONS)	DESCRIPTION
/WW	Warm White Versions
/DL	Daylight Versions
/DM3	DALI Emergency
/OCTO	OCTO Smart Control

CODE (ACCESSORIES)	DESCRIPTION
APACLED/SK	Pace Suspension Kit
ASMF30/I	1200x300 Surface Mounting Frame
APRK/30	1200x300 Plasterboard Recessed Kit
ADDIM/30/MC	30W Multi-current Dimmable LED Driver

