


LEDPRO70WH

70W LED Professional Rewireable Floodlight - White

Features & Benefits

- 70W LED Floodlight White
- Fully polycarbonate front lens for enhanced light control, ideal for food preparation areas and grain stores
- Plug & Play PIR or Photocell option with linkable control (optional extra)
- Easy install bracket – enables floodlight fixing screws to be pre-fitted
- Durable powder coated finish
- IP65 weatherproof rating
- Adjustable mounting bracket with hook feature to enable easy assembly
- Driverless ACLED technology
- Rewireable with easy access screw terminals with link terminal for common accessories control

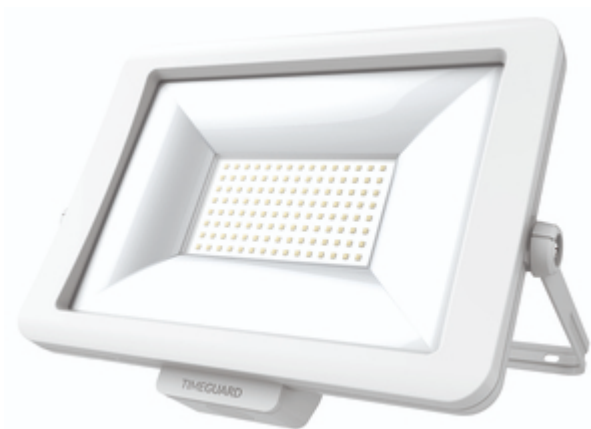

Technical Data

Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Bracket Mounted
Earth Class Rating	Class I
Operating Temperature	-20°C to 40°C
Ingress Protection Rating	IP65
Wattage	70
Beam Angle	113° x 114°
Pan & Tilt Adjustment	360° (Tilt)

Data sheet

LEDPRO70WH

Light / LEDPRO Lighting

Energy Efficiency	Class F
Energy Usage	70kWh/1000H
Lumen Output (lm)	7800
Luminaire Efficiency	111 lm/W
Colour Temperature (K)	4000
LED Type	SMD (Integrated)
Mounting Hole Centres (mm)	260
Multiple Unit Support	Yes
Cable Capacity (mm2)	1.5mm ² (Twin & Earth Cable)
Cable Entry(s)	Back Entry

General

Weight (g)	1530
Height (mm)	235
Width (mm)	305
Depth (mm)	66
Body Construction	Polycarbonate (Body) Aluminium (Bracket)
Product Colour	White
Accessories (Included)	Fittings (Rawl Plugs, Grommits, Screws)
Accessories (Optional)	LEDPROCAM, LEDPROPCB, LEDPROPCWH, LEDPROSLB, LEDPROSLWH, LEDPRORFKB, LEDPRORFKWH, LEDPROFOB
EAN Number	5012483014813
Guarantee Period	3 Years
Trade Tariff Commodity Code	9405114090

Data sheet

LEDPRO70WH

Light / LEDPRO Lighting

Line Diagrams

